



1802 AUTO DIALER TELEPHONE INTERCOM SYSTEM



flush mount



surface mount



built-in display
indicates door/gate has
been opened



telephone access
systems use a modular design
concept that makes installation
and service easy



dtmf tone output
allows these systems to be used
with PBX, KSU and telephone
systems with auto-attendants



lighted
keypad and display

- Ideal for applications with limited space, or for applications that do not require a directory, or where a separate directory exists
- Provides visitor access control into apartment buildings, gated communities, condominiums, office buildings, factories and industrial sites
- Visitors use the 1802 to communicate with a resident, who can then grant or deny them access from their touch-tone telephone
- Provides service for up to 1000 residents
- Programmable directory codes can be set from 1 to 4 digits
- Surface or flush mount styles available

FEATURES


ACCESS CONTROL SOLUTIONS







1802 AUTO DIALER TELEPHONE INTERCOM


The model 1802 is an ideal telephone entry system that is suited for applications that have limited space and can be used in residential as well as commercial applications, applications that do not require a directory, or in applications where a separate directory exists. Visitors are easily identified by voice communication and can be granted or denied access directly from a touch-tone telephone.



1802 Surface
6.5" W x 12" H x 5" D@ top 3.25"@ bottom
16.5cm W x 30.4cm H x 12.7cm D@ top
8.2cm@ bottom

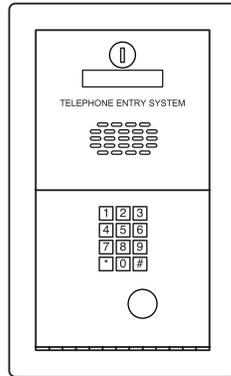

1802 Flush
8.375" W x 14" H x 3.25" D
30.4cm W x 34.3cm H x 6.35cm D



1802 Specs

Communication

True full duplex
Hands free
Optional handset available (ADA compliant) on surface mount units only

Display & Mounting Styles

Surface or flush mount (surface mount with lighted keypad and display)
Display for programming assistance and shows 'open' when access is granted

Capacity

125, 500 or 1000 phone numbers, 15 area codes
4 digit entry codes same as system memory
5 digit entry codes = 6

Door/Gate Control

Two relays allow for control of both a vehicular gate and a pedestrian gate

Programming Methods

System keypad
Touch-tone telephone

Advanced Features

Programmable directory codes can be set from 1 to 4 digits in length
10 & 11 digit dialing capability
LCD Programming display
Built in clock/calendar
Time clock has its own backup power source
Entry code time zones
Four hold-open time zones
Flash entry codes
DTMF tone output allows for use with KSU, PBX and systems with an auto-attendant
Built-in postal lock provision

Options

Heater kit - recommended when temperatures routinely fall below 10°F (-12°C)
Camera ready:
Optional B&W or Color CCTV camera*
*may require additional CCTV equipment

Operating Temp

10°F to 145°F
-12°C to 62°C
Optional heater kit available for colder climates

Electrical Requirements

16 V AC, 20 VA System power (250 ma)
U.L. listed power transformer provided
Ringer equivalence: 0.0A Jack Type: RJ11C or W

Safety Standards

FCC (US) DUF6VT-12874-OT-0
DOC (CAN) 1736 4507 A
Complies with UL 294
ETL Listed

Shipping Weight

Approximately 15-20 lbs (6.8-9 kg)

Warranty

2 year limited factory warranty

DOORKING, INC.
120 Glasgow Avenue, Inglewood, California 90301 U.S.A. Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com
© 2006 All Rights Reserved. Product specifications may change without notice. Rev. 11/06

Distributed by:



AR LINK SERVICES
PTE LTD

Blk 1014 Geylang East Ave 3 #06-180 (S)389729
Tel : 65 6748 0292 Fax : 65 6848 4364
Email : admin@arlink.com.sg

MEMBER:

